BLUE OUTLINE MARKS THE BOTTOM PERIMETER OF THE SAFETY ZONE

RED MARKS THE MIN CLEARANCES FOR AIR CIRCULATION

THE TOP OF THE SAFETY ZONE IS FLUSH WITH THE TOP OF THE UNIT

NO OPEN DRAINS ALLOWED IN EITHER THE RED OR BLUE AREA UNLESS SEPARATED FROM THE UNIT BY A WALL OR FENCE

NO POINTS OF IGNITION INCLUDING ELECTRICAL ISOLATORS ARE ALLOWED IN THE SAFETY ZONE

WHEN INSTALLED ON THE GROUND IN FRONT OF A BUILDING WALL

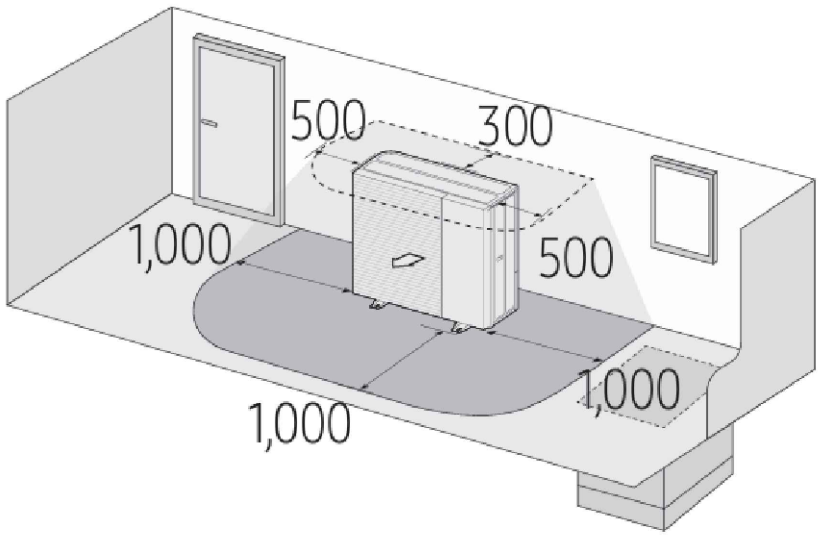

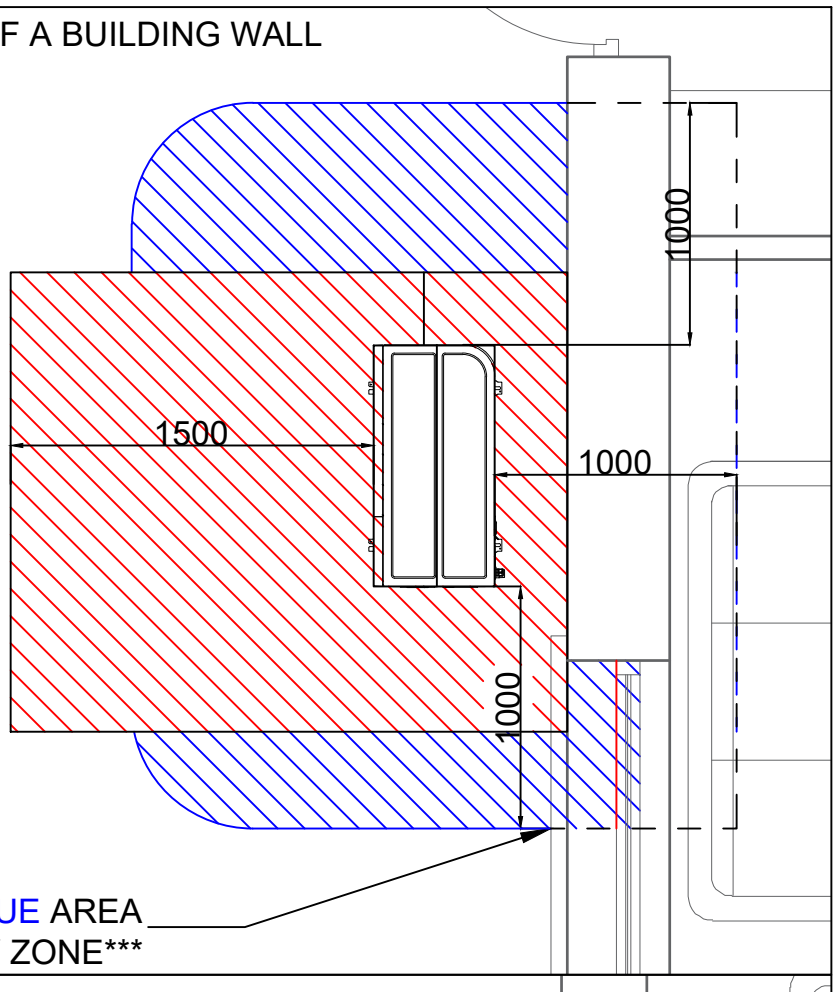

OPENINGS WITHIN THE BLUE AREA NEED TO BE ABOVE THE SAFETY ZONE

WHEN INSTALLED AT THE LEFT CORNER OF A BUILDING

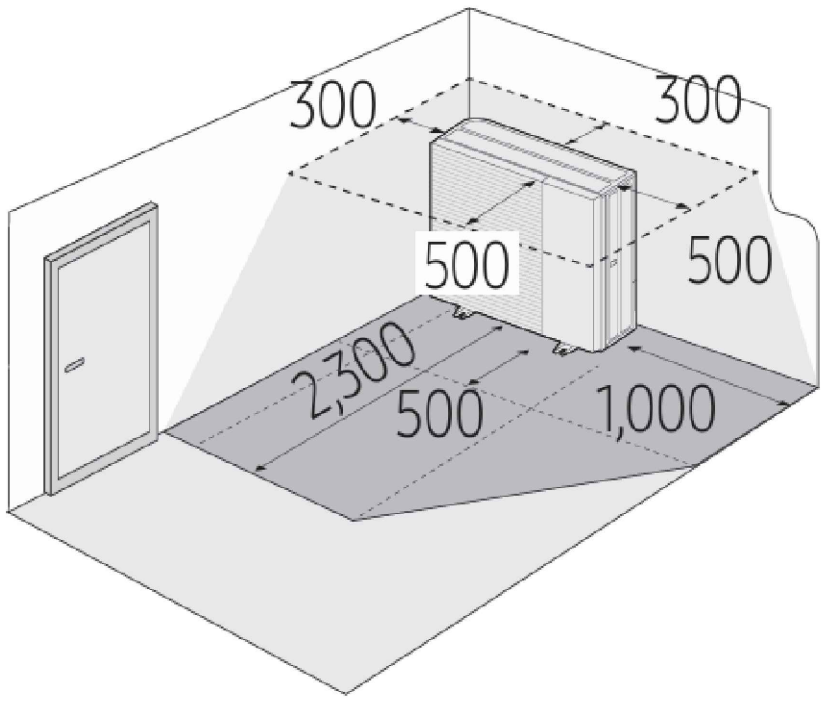

OPENINGS WITHIN THE BLUE AREA NEED TO BE ABOVE THE SAFETY ZONE

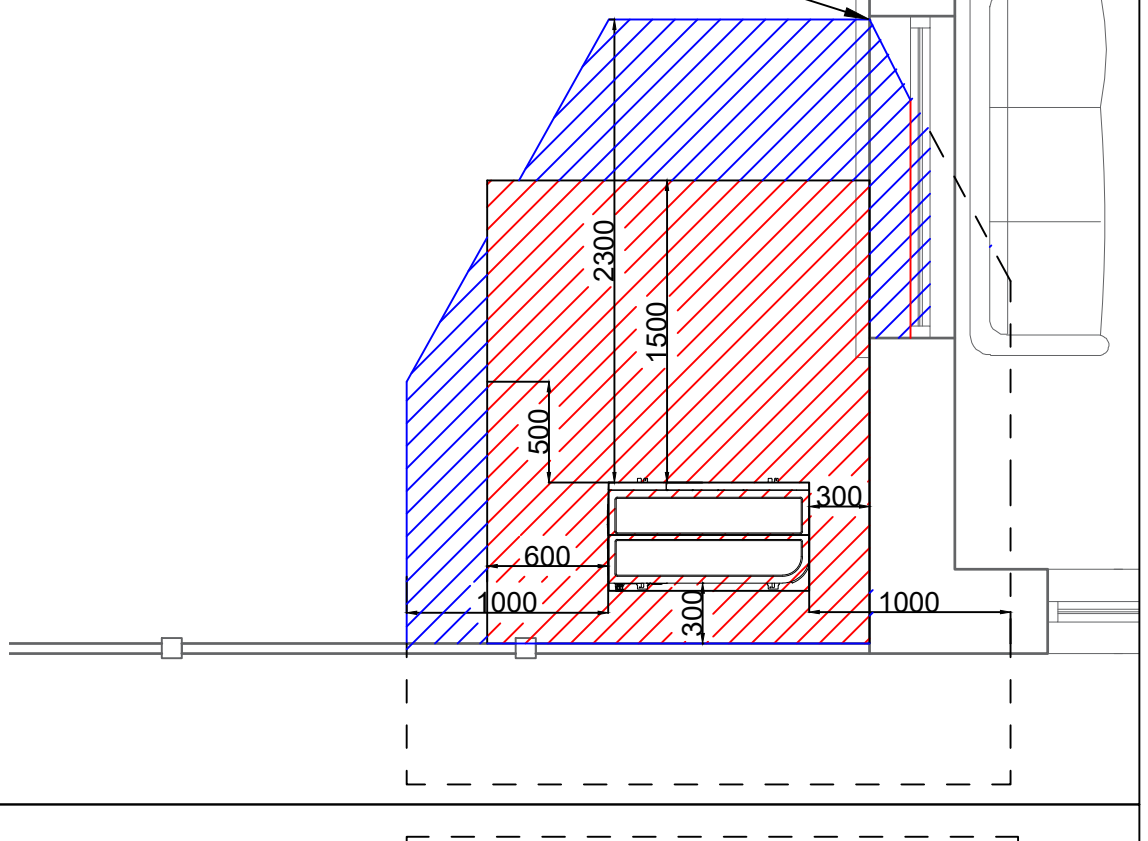

WHEN INSTALLED AT THE RIGHT CORNER OF A BUILDING

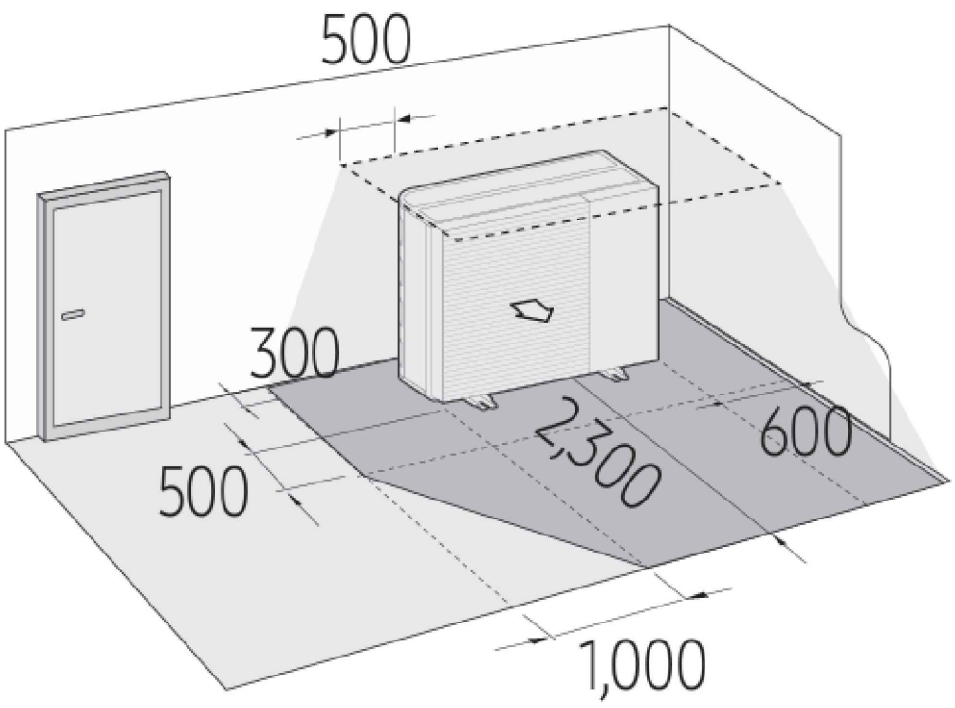

OPENINGS WITHIN THE BLUE AREA NEED TO BE ABOVE THE SAFETY ZONE